

Digital input 16 point

For 16 digital signals with fuse or disconnection per channel

6ES7321-1BH02-0AA0 / 6ES7321-1BH10-0AA0

ST800 20P series



Bolt up



Bolt lock




Dark gray

D



ST800-DI16SC-CFD 8.00 Pitch

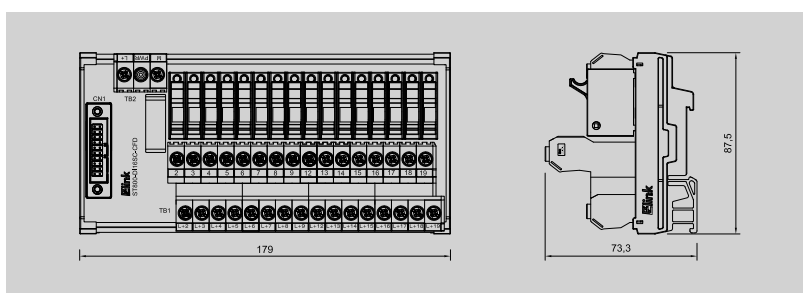

Technical data

Connection data	
Connection to PLC	HE 10 connectors 20-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Input-output data	
Operating voltage	24VDC ± 10%
Max. current for channel	1.5A
Number of signals	16
PLC card supply voltage / LED voltage status	24VDC ± 10% / LED green
LED fuse indication per channel	Red
PLC card supply current	2A
Fuse per channel	100 ~ 500mA
General data	
Ambient temperature	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Rated voltage	≤ 50V AC
Insulation test voltage	0.5KV DC
Weight 6.50 / 8.00	Approx. ---g / 421.4g
Dimensions	
Length x width x height (mm)	6.50 Pitch
	8.00 Pitch
Mounting rail	
Ordering data	
Order No.	
--- (6.50 Pitch)	822220007 (8.00 Pitch)
Accessories / Spare part	
Terminal markers	6.50 8.00 DEK 5/8
Cross-connector	6.50 8.00 COM-8009
Use with	
Front connector	Cable
S7-300S-DA20P	DAHHC20-10K24B

