
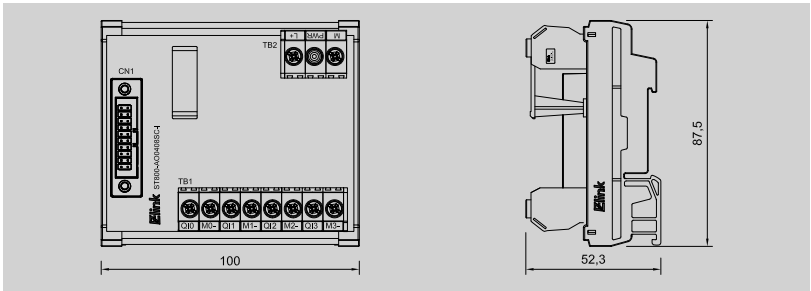



Analog output 8 point
For 4 analog signals

6ES7332-5RD00-0AB0 (current - 2wire)

ST800 20P series



ST800-A00408SC-I 8.00 Pitch

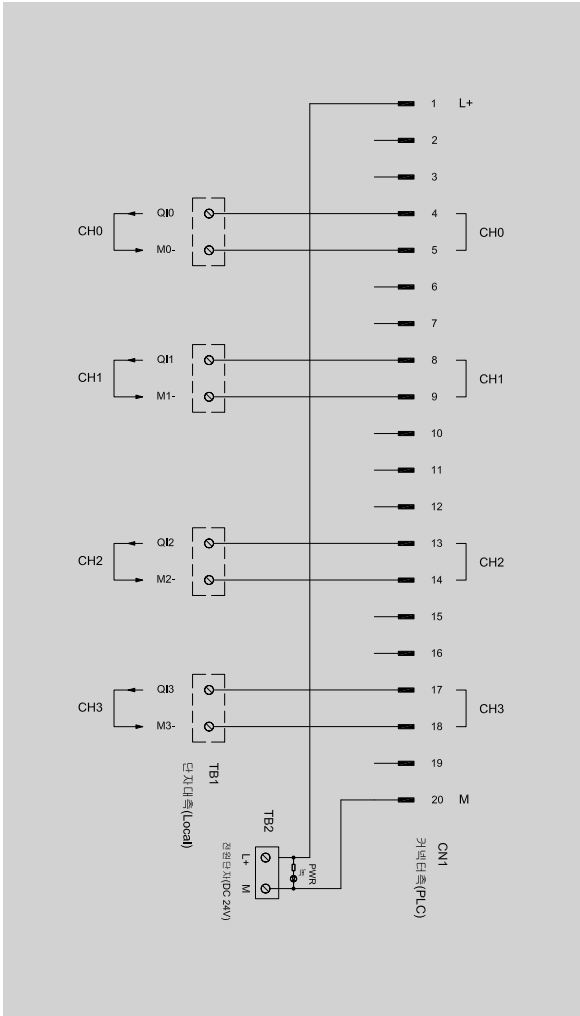

Technical data

Connection data	
Connection to PLC	HE 10 connectors 20-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Input-output data	
Operating voltage	24VDC ± 10%
Max. current for channel	1.5A
Number of signals	8
PLC card supply voltage / LED voltage status	24VDC ± 10% / LED green
LED fuse indication per channel	-
PLC card supply current	2A
Fuse per channel	-
General data	
Ambient temperature	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Rated voltage	≤ 50V AC
Insulation test voltage	0.5KV DC
Weight 6.50 / 8.00	Approx. ---g / 115.2g
Dimensions	
Length x width x height (mm)	6.50 Pitch
	8.00 Pitch
Mounting rail	
Ordering data	
Order No.	
--- (6.50 Pitch)	
Accessories / Spare part	
Terminal markers	6.50
Cross-connector	6.50
Use with	
Front connector	Cable
S7-300S-DA20P	DAHHC20-10K24B