
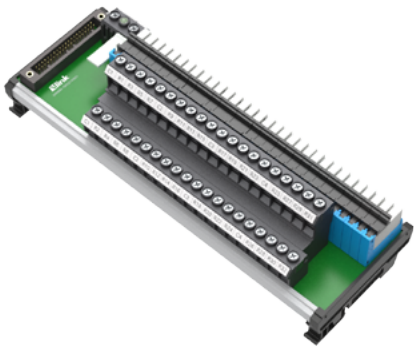


Digital output relay unit  
For 32 isolated digital output signals



6ES7322-1BL00-0AA0

Relay - WAGO 6A 32 point (32a), 8COM x 4

SR800 40P series



SR800-D03240SD (W6)

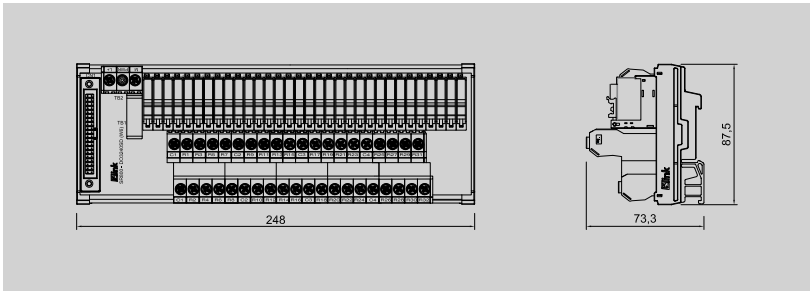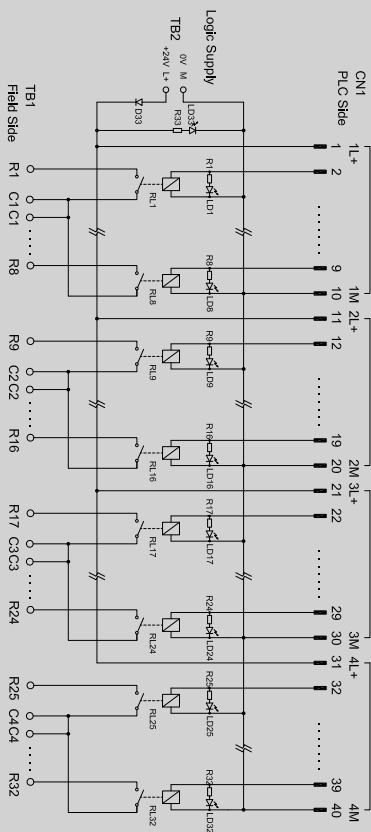

| Technical data                    |                            |                           |
|-----------------------------------|----------------------------|---------------------------|
| Connection data                   |                            |                           |
| Connection to PLC                 | HE 10 connectors 40-pin    |                           |
| Connection type (field)           | Screw bolt up              |                           |
| Connection size (field)           | 0.34 – 2.5mm² (AWG22 – 14) |                           |
| Nominal input data (coil)         |                            |                           |
| Rated voltage                     | 24VDC ± 10%                |                           |
| Rated current DC                  | 9.2mA                      |                           |
| Pick-up / drop-out volt. DC-coil  | >16.8V / <3.5V             |                           |
| Coil resistance (+ / - 10%)       | 2,600                      |                           |
| Power rating                      | 220mW                      |                           |
| LED status indication per channel | Green(5mA)                 |                           |
| Nominal output data               |                            |                           |
| Contact material                  | AgSnO2                     |                           |
| Operating voltage                 | 250VAC                     |                           |
| Max.switching current             | 6A                         |                           |
| Nominal switching capacity        | 6A 250VAC, 6A 30VDC        |                           |
| Minimum contact current           | 1mA                        |                           |
| Minimum contact voltage           | 24V                        |                           |
| General data                      |                            |                           |
| Ambient temperature (operational) | -25°C – 50°C               |                           |
| Storage temperature               | -40°C – 60°C               |                           |
| Weight 6.50 / 8.00                | Approx. ---g / 680.7g      |                           |
| Dimensions                        |                            |                           |
| Length x width x height (mm)      | 6.50 Pitch                 | -                         |
|                                   | 8.00 Pitch                 | 248 x 87.5 x 73.3         |
| Mounting rail                     | TS35 (Weidmuller)          |                           |
| Ordering data                     |                            |                           |
| Order No.                         |                            |                           |
| --- (6.50 Pitch)                  | 834220014 (8.00 Pitch)     |                           |
| Accessories / Spare part          |                            |                           |
| Terminal markers                  | 6.50                       | 8.00 DEK 5/8              |
| Cross-connector                   | 6.50                       | 8.00 COM-8009             |
| Use with                          |                            |                           |
| Front connector                   | Cable                      |                           |
| S7-300S-DA40P                     | Page : 99                  | DAHHC40-10K24B Page : 106 |