

## Digital output relay unit

For 16 isolated digital output signals

6ES7322-1BH01-0AA0 / 6ES7322-1BH10-0AA0

Relay - TAKAMISAWA 5A 16 point (16a)

**SR650 20P series**





Bolt up




Bolt lock



Dark gray

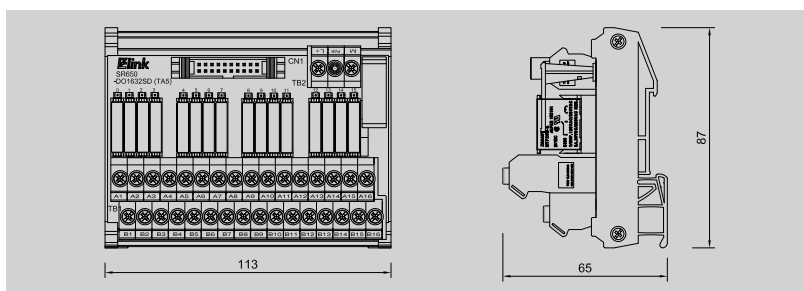

SR650-D01632SD (TA5)

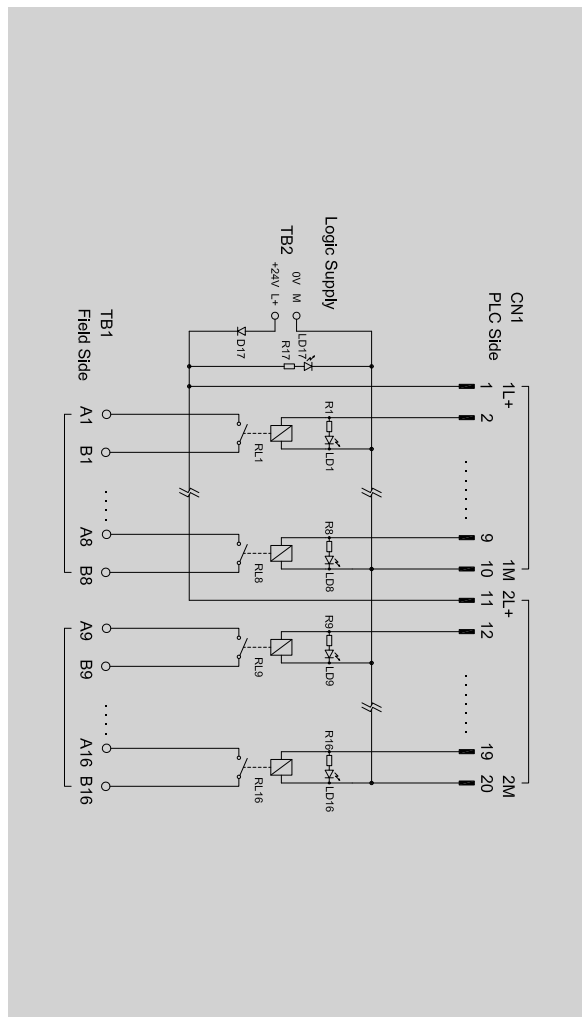

### Technical data

|                                   |                                            |
|-----------------------------------|--------------------------------------------|
| Connection data                   |                                            |
| Connection to PLC                 | HE 10 connectors 20-pin                    |
| Connection type (field)           | Screw bolt up                              |
| Connection size (field)           | 0.34 ~ 2.5mm <sup>2</sup> (AWG22 ~ 14)     |
| Nominal input data (coil)         |                                            |
| Rated voltage                     | 24VDC ± 10%                                |
| Rated current DC                  | 5.0mA                                      |
| Pick-up / drop-out volt. DC-coil  | >16.1V / <2.4V                             |
| Coil resistance (+ / - 10%)       | 4,800                                      |
| Power rating                      | 120mW                                      |
| LED status indication per channel | Red(5mA)                                   |
| Nominal output data               |                                            |
| Contact material                  | Gold overlay silver alloy                  |
| Operating voltage                 | 250VAC                                     |
| Max.switching current             | 5A                                         |
| Nominal switching capacity        | 5A 250VAC, 5A 30VDC                        |
| Minimum contact current           | 1mA                                        |
| Minimum contact voltage           | 5V                                         |
| General data                      |                                            |
| Ambient temperature               | -25°C ~ 50°C                               |
| Storage temperature               | -40°C ~ 60°C                               |
| Weight 6.50 / 8.00                | Approx. 319.1g / ---g                      |
| Dimensions                        |                                            |
| Length x width x height (mm)      | 6.50 Pitch: 113 x 87 x 65<br>8.00 Pitch: - |
| Mounting rail                     |                                            |
| TS35 (Weidmuller)                 |                                            |
| Ordering data                     |                                            |
| Order No.                         |                                            |
| 632220001 (6.50 Pitch)            | --- (8.00 Pitch)                           |
| Accessories / Spare part          |                                            |
| Terminal markers                  | 6.50: 8.00                                 |
| Cross-connector                   | 6.50 COM-6509: 8.00                        |
| Use with                          |                                            |
| Front connector                   | Cable                                      |
| S7-300S-DA20P                     | DHH20-10K25L                               |