

Digital output relay unit

For 32 isolated digital output signals (fuses) input selection ON / OFF / AUTO

6ES7322-1BL00-0AA0

Relay - Tyco 8A 32 point (32a, 32a)

SR800 40P series



Bolt up




Bolt lock




Orange



Dark gray

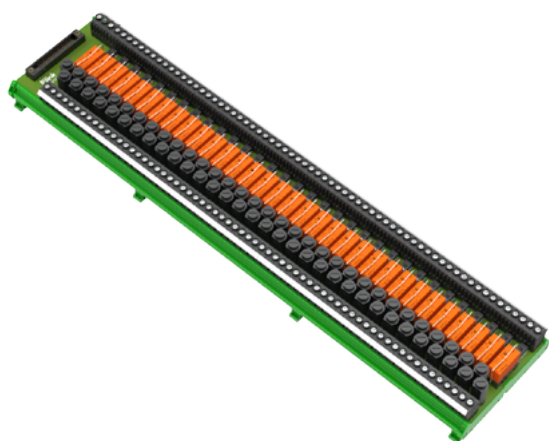

SR800-D032128SDSF(S8)

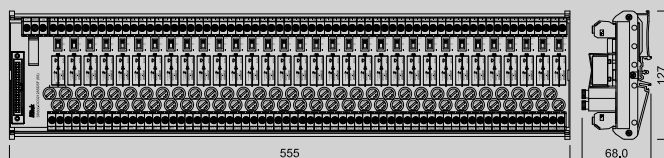

Technical data

Connection data	
Connection to PLC	HE 10 connectors 40-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Nominal input data (coil)	
Rated voltage	24VDC ± 10%
Rated current DC	16.7mA
Pick-up / drop-out volt. DC-coil	>16.8V / <2.4V
Coil resistance (+ / - 10%)	1,440
Power rating	400mW
LED status indication per channel	Red(5mA)
Nominal output data	
Contact material	AgNi 90/10
Operating voltage	250VAC
Max. switching current	8A
Nominal switching capacity	8A 250VAC, 8A 30VDC
Minimum contact current	10mA
Minimum contact voltage	10V
Fuse per relay	5 / 8A
General data	
Ambient temperature (operational)	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Weight 6.50 / 8.00	Approx. ---g / 1,560.8g
Dimensions	
Length x width x height (mm)	8.00 Pitch 555 x 127 x 68
Mounting rail	TS35 (Weidmuller)

Ordering data

Order No.	
--- (6.50 Pitch)	834219019 (8.00 Pitch)

Accessories / Spare part

Terminal markers	6.50	8.00 DEK 5/8
Cross-connector	6.50	8.00 COM-8009

Use with

Front connector	Cable
S7-300S-DA40P	DAHHC40-10K24B

Page : 99

Page : 106

