
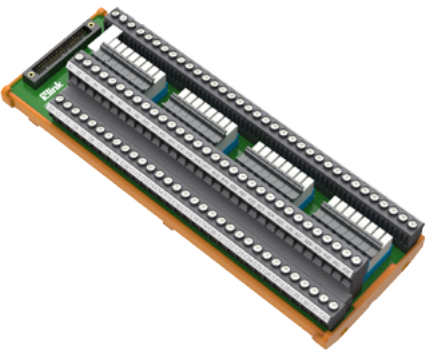



Digital output relay unit
For 32 isolated digital output signals
Relay - WAGO 6A 32 point (32a, 32b)

6ES7322-1BL00-0AA0

SR800 40P series



SR800-D03296SD (W6)

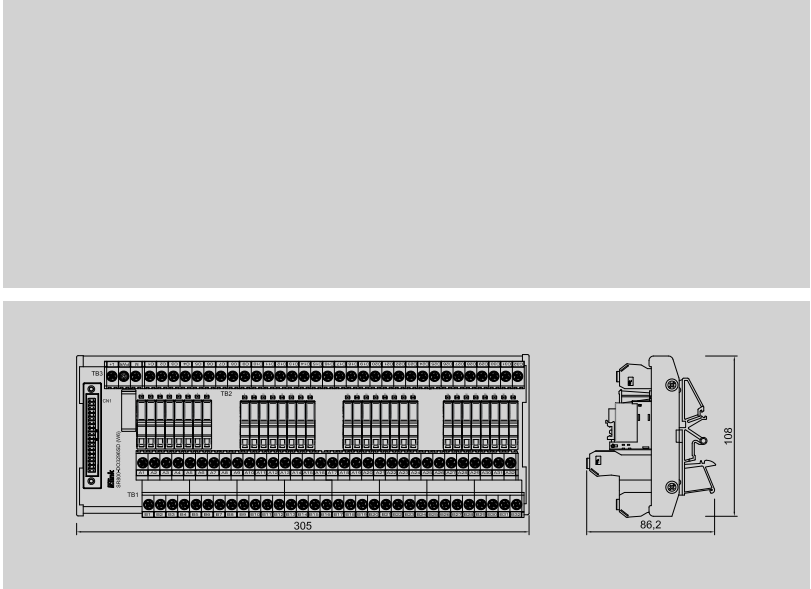

Technical data

Connection data	
Connection to PLC	HE 10 connectors 40-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm² (AWG22 ~ 14)
Nominal input data (coil)	
Rated voltage	24VDC ± 10%
Rated current DC	9.2mA
Pick-up / drop-out volt. DC-coil	>16.8V / <3.5V
Coil resistance (+ / - 10%)	2,600
Power rating	220mW
LED status indication per channel	Green(5mA)
Nominal output data	
Contact material	AgSnO2
Operating voltage	250VAC
Max.switching current	6A
Nominal switching capacity	6A 250VAC, 6A 30VDC
Minimum contact current	1mA
Minimum contact voltage	24V
General data	
Ambient temperature (operational)	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Weight 6.50 / 8.00	Approx. ---g / 1,076.6g
Dimensions	
Length x width x height (mm)	6.50 Pitch - 8.00 Pitch 305 x 108 x 86.2
Mounting rail	TS35 (Weidmuller)
Ordering data	
Order No.	
--- (6.50 Pitch)	8342180016 (8.00 Pitch)
Accessories / Spare part	
Terminal markers	6.50 8.00 DEK 5/8
Cross-connector	6.50 8.00 COM-8009
Use with	
Front connector	Cable
S7-300S-DA40P	DAHHC40-10K24B

