


Assembled round 40P cable
Assembled round cable for Fuji AAI05 / AAI005 / AIS02

Fuji series



DAFUHC40-10K24B

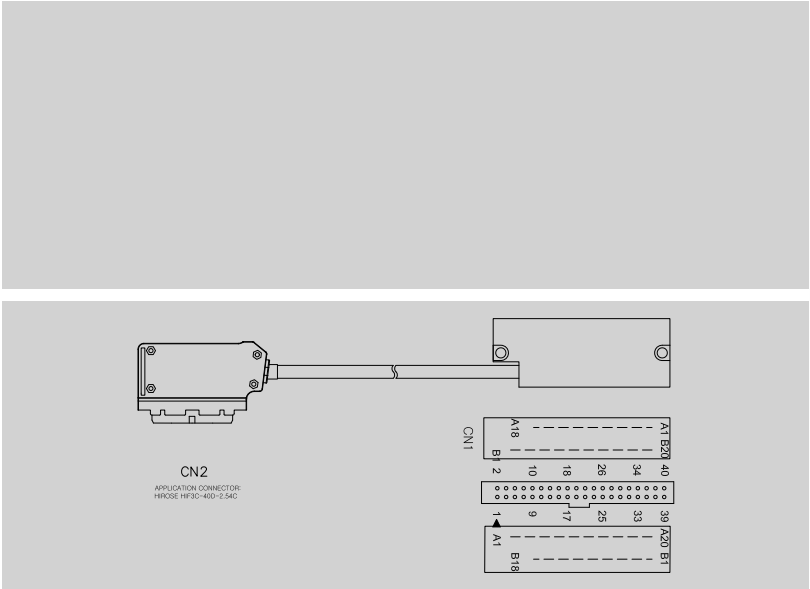

Technical data

Table with 2 columns: Technical data, Value. Rows include Connection data, Connection to PLC, Connection type, and Connection size.

Table with 2 columns: Rated data, Value. Rows include Number of signals, Rated voltage, MAX. connector pin, and MAX. permissible summation current.

Table with 2 columns: General data, Value. Rows include Ambient temperature, Storage temperature, Insulation test voltage, and Weight.

Table with 2 columns: Dimensions, Value. Row includes Length x width x height (mm).

Table with 2 columns: Ordering data, Value. Rows include Order No. and Accessories / Spare part.

Pin configuration table mapping PLC Front connector pin numbers to Connector Pin numbers (A1-A18, B1-B18, FG, AGND).

PLC Front connector Pin number
Front connector CN1
Connector Pin number
단자대측 CN2