

Digital output relay unit
For 32 isolated digital output signals
Relay - WAGO 6A 32 point (32a)

6ES7322-1BL00-0AA0

SR800 40P series




Bolt up





Bolt lock



Dark gray

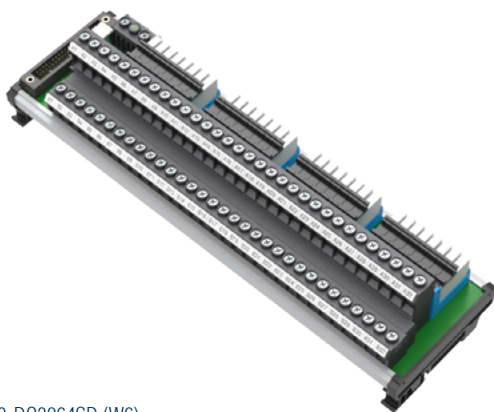

SR800-D03264SD (W6)

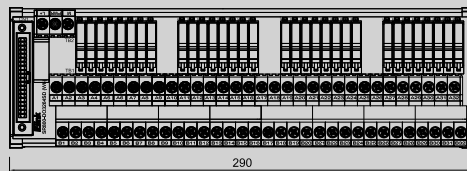

Technical data

Connection data		
Connection to PLC		HE 10 connectors 40-pin
Connection type (field)		Screw bolt up
Connection size (field)		0.34 ~ 2.5mm² (AWG22 ~ 14)
Nominal input data (coil)		
Rated voltage		24VDC ± 10%
Rated current DC		9.2mA
Pick-up / drop-out volt. DC-coil		>16.8V / <3.5V
Coil resistance (+ / - 10%)		2,600
Power rating		220mW
LED status indication per channel		Green(5mA)
Nominal output data		
Contact material		AgSnO2
Operating voltage		250VAC
Max.switching current		6A
Nominal switching capacity		6A 250VAC, 6A 30VDC
Minimum contact current		1mA
Minimum contact voltage		24V
General data		
Ambient temperature (operational)		-25°C ~ 50°C
Storage temperature		-40°C ~ 60°C
Weight 6.50 / 8.00		Approx. ---g / 836.5g
Dimensions		
Length x width x height (mm)	6.50 Pitch	-
	8.00 Pitch	290 x 87.5 x 73.3
Mounting rail		TS35 (Weidmuller)
Ordering data		
Order No.		
--- (6.50 Pitch)		8342180015 (8.00 Pitch)
Accessories / Spare part		
Terminal markers	6.50	8.00 DEK 5/8
Cross-connector	6.50	8.00 COM-8009
Use with		
Front connector		Cable
S7-300S-DA40P		DAHHC40-10K24B
Page : 99		Page : 106

