

Digital output relay unit

For 32 isolated digital output signals

6ES7322-1BL00-0AA0

Relay - TAKAMISAWA 5A 32 point (32a)

SR650 40P series




Bolt up




Bolt lock



Dark gray

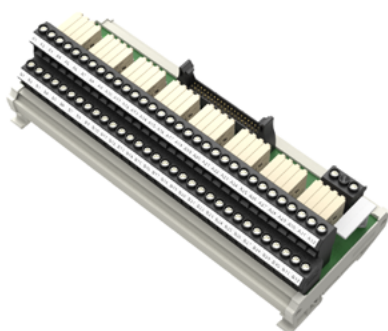

SR650-D03264SD (TA5)

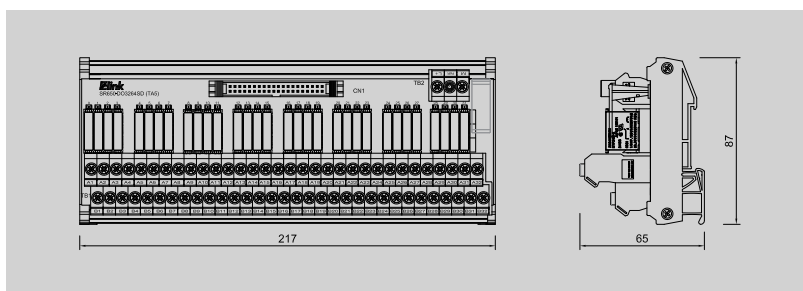

Technical data

Connection data		
Connection to PLC		HE 10 connectors 40-pin
Connection type (field)		Screw bolt up
Connection size (field)		0.34 ~ 2.5mm² (AWG22 ~ 14)
Nominal input data (coil)		
Rated voltage		24VDC ± 10%
Rated current DC		5.0mA
Pick-up / drop-out volt. DC-coil		>16.1V / <2.4V
Coil resistance (+ / - 10%)		4,800
Power rating		120mW
LED status indication per channel		Red(5mA)
Nominal output data		
Contact material		Gold overlay silver alloy
Operating voltage		250VAC
Max.switching current		5A
Nominal switching capacity		5A 250VAC, 5A 30VDC
Minimum contact current		1mA
Minimum contact voltage		5V
General data		
Ambient temperature		-25°C ~ 50°C
Storage temperature		-40°C ~ 60°C
Weight 6.50 / 8.00		Approx. 613.3g / ---g
Dimensions		
Length x width x height (mm)	6.50 Pitch	217 x 87 x 65
	8.00 Pitch	-
Mounting rail		TS35 (Weidmuller)
Ordering data		
Order No.		
634217004 (6.50 Pitch)		--- (8.00 Pitch)
Accessories / Spare part		
Terminal markers	6.50	8.00
Cross-connector	6.50 COM-6509	8.00
Use with		
Front connector	Cable	
S7-300S-DA40P	Page : 99	DHH40-10K25L Page : 107

