

Digital output relay unit

For 32 isolated digital output signals

6ES7322-1BL00-0AA0

Relay - WAGO 6A 32 point (32a, 32b)

SR650 40P series




Bolt up




Bolt lock



Dark gray

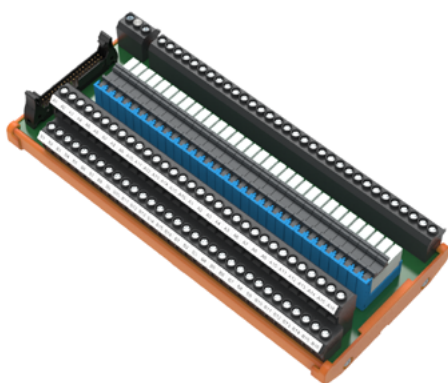

SR650-D03296SD (W6)

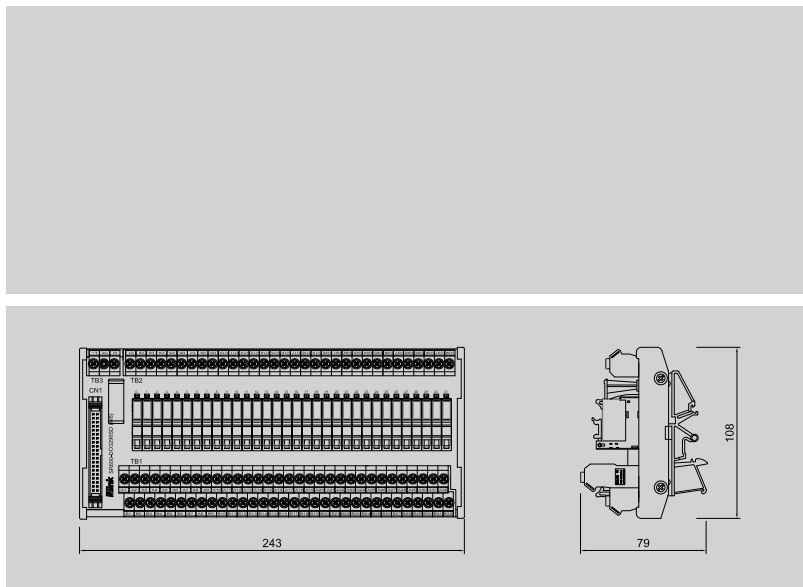

Technical data

Connection data		
Connection to PLC	HE 10 connectors 40-pin	
Connection type (field)	Screw bolt up	
Connection size (field)	0.34 ~ 2.5mm² (AWG22 ~ 14)	
Nominal input data (coil)		
Rated voltage	24VDC ± 10%	
Rated current DC	9.2mA	
Pick-up / drop-out volt. DC-coil	>16.8V / <3.5V	
Coil resistance (+ / - 10%)	2,600	
Power rating	220mW	
LED status indication per channel	Red(5mA)	
Nominal output data		
Contact material	AgSnO2	
Operating voltage	250VAC	
Max.switching current	6A	
Nominal switching capacity	6A 250VAC, 6A 30VDC	
Minimum contact current	1mA	
Minimum contact voltage	24V	
General data		
Ambient temperature	-25°C ~ 50°C	
Storage temperature	-40°C ~ 60°C	
Weight 6.50 / 8.00	Approx. 828.0g / ---g	
Dimensions		
Length x width x height (mm)	6.50 Pitch	243 x 108 x 79
	8.00 Pitch	-
Mounting rail	TS35 (Weidmuller)	
Ordering data		
Order No.		
634217005 (6.50 Pitch)		--- (8.00 Pitch)
Accessories / Spare part		
Terminal markers	6.50	8.00
Cross-connector	6.50 COM-8009	8.00
Use with		
Front connector	Cable	
S7-300S-DA40P	Page : 99	DHH40-10K25L Page : 107

