

Digital input relay unit

For 32 isolated digital input signals

6ES7321-1BL00-0AA0

Relay - TAKAMISAWA 5A 32 point (32a)

SR650 40P series




Bolt up




Bolt lock



Dark gray

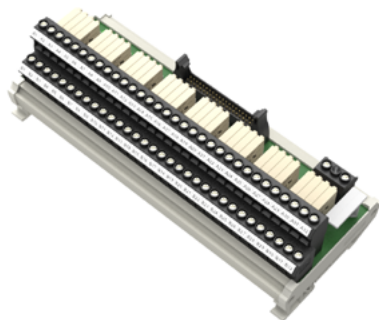

SR650-DI3264SD (TA5)

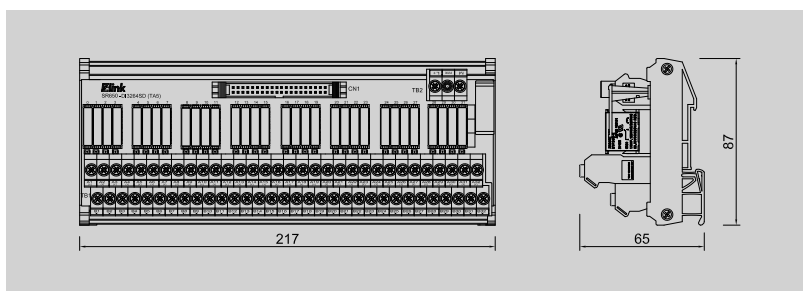

Technical data

Connection data		
Connection to PLC	HE 10 connectors 40-pin	
Connection type (field)	Screw bolt up	
Connection size (field)	0.34 ~ 2.5mm² (AWG22 ~ 14)	
Nominal input data (coil)		
Rated voltage	24VDC ± 10%	
Rated current DC	5.0mA	
Pick-up / drop-out volt. DC-coil	>16.1V / <2.4V	
Coil resistance (+ / - 10%)	4,800	
Power rating	120mW	
LED status indication per channel	Red(5mA)	
Nominal output data		
Contact material	Gold overlay silver alloy	
Operating voltage	250VAC	
Max.switching current	5A	
Nominal switching capacity	5A 250VAC, 5A 30VDC	
Minimum contact current	1mA	
Minimum contact voltage	5V	
General data		
Ambient temperature (operational)	-25°C ~ 50°C	
Storage temperature	-40°C ~ 60°C	
Weight 6.50 / 8.00	Approx. 623.3g / ---g	
Dimensions		
Length x width x height (mm)	6.50 Pitch	217 x 87 x 65
	8.00 Pitch	-
Mounting rail	TS35 (Weidmuller)	
Ordering data		
Order No.		
634217011 (6.50 Pitch)		--- (8.00 Pitch)
Accessories / Spare part		
Terminal markers	6.50	8.00
Cross-connector	6.50 COM-6509	8.00
Use with		
Front connector	Cable	
S7-300S-DA40P	Page : 99	DHH40-10K25L Page : 107

