

Digital output relay unit

For 32 isolated digital output signals with fuse per channel

6ES7322-1BL00-0AA0

Relay - Tyco 8A 32 point (32a)

SR650 40P series




Bolt up




Bolt lock



Dark gray

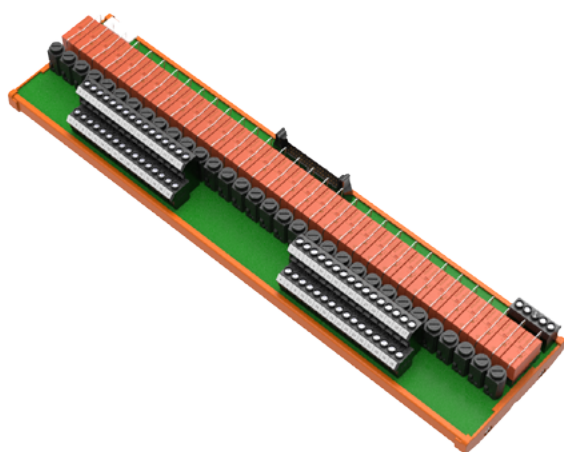

SR650-D03264SDF (S8)

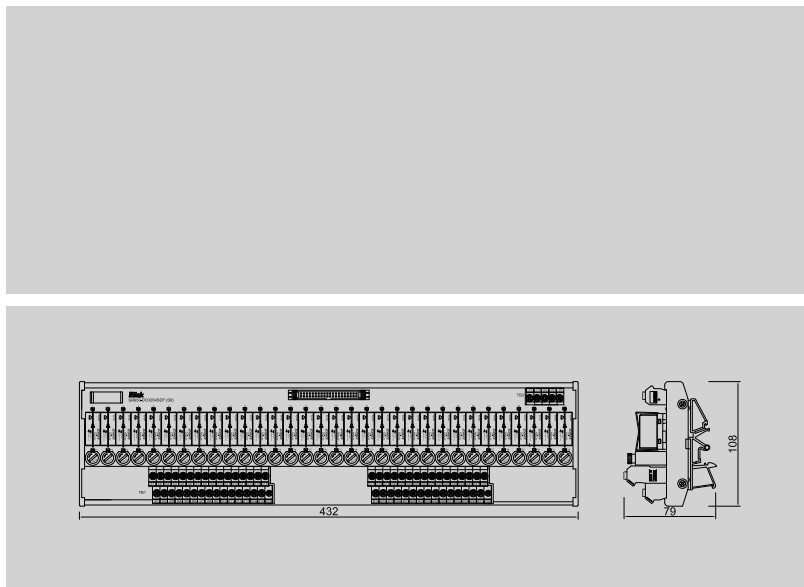

Technical data

Connection data	
Connection to PLC	HE 10 connectors 40-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Nominal input data (coil)	
Rated voltage	24VDC ± 10%
Rated current DC	16.7mA
Pick-up / drop-out volt. DC-coil	>16.8V / <2.4V
Coil resistance (+ / - 10%)	1,440
Power rating	400mW
LED status indication per channel	Red(5mA)
Nominal output data	
Contact material	AgNi 90/10
Operating voltage	250VAC
Max.switching current	8A
Nominal switching capacity	8A 250VAC, 8A 30VDC
Minimum contact current	10mA
Minimum contact voltage	10V
Fuse per relay	5 / 8A
General data	
Ambient temperature (operational)	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Weight 6.50 / 8.00	Approx. 1,319.1g / ---g
Dimensions	
Length x width x height (mm)	6.50 Pitch 432 x 108 x 79
Mounting rail	TS35 (Weidmuller)

Ordering data

Order No.	
634217009 (6.50 Pitch)	--- (8.00 Pitch)

Accessories / Spare part

Terminal markers	6.50	8.00
Cross-connector	6.50 COM-6509	8.00

Use with

Front connector	Cable
S7-300S-DA40P	DHH40-10K25L

Page : 99

Page : 107

