

Digital output relay unit

For 32 isolated digital output signals with fuse per channel

6ES7322-1BL00-0AA0

Relay - TAKAMISAWA 5A 32 point (32a), Input selection ON / OFF / AUTO

SR650 40P series




Bolt up




Bolt lock



Dark gray

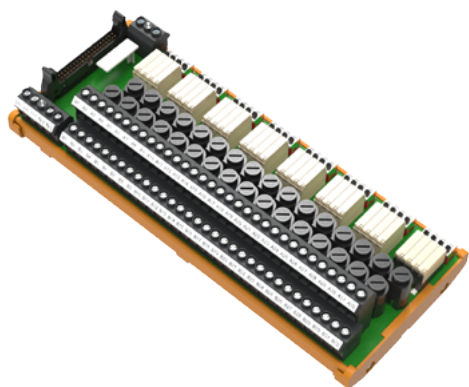

SR650-D03264SWSF (TA5)

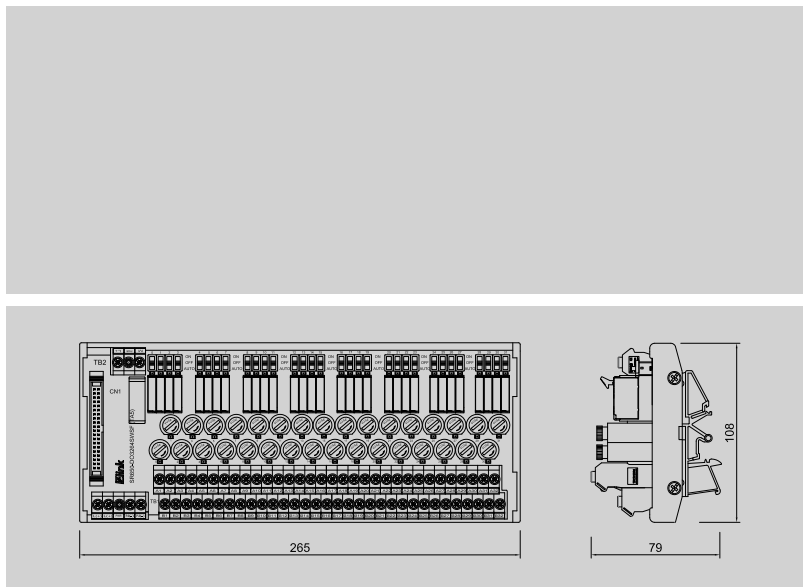

Technical data

Connection data	
Connection to PLC	HE 10 connectors 40-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Nominal input data (coil)	
Rated voltage	24VDC ± 10%
Rated current DC	5.0mA
Pick-up / drop-out volt. DC-coil	>16.1V / <2.4V
Coil resistance (+ / - 10%)	4,800
Power rating	120mW
LED status indication per channel	Red(5mA)
Nominal output data	
Contact material	Gold overlay silver alloy
Operating voltage	250VAC
Max. switching current	5A
Nominal switching capacity	5A 250VAC, 5A 30VDC
Minimum contact current	1mA
Minimum contact voltage	5V
Fuse per relay	3 / 5A
General data	
Ambient temperature (operational)	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Weight 6.50 / 8.00	Approx. 878.3g / ---g
Dimensions	
Length x width x height (mm)	6.50 Pitch 265 x 108 x 79
Mounting rail	TS35 (Weidmuller)
Ordering data	
Order No.	
634217007 (6.50 Pitch)	--- (8.00 Pitch)
Accessories / Spare part	
Terminal markers	6.50 8.00
Cross-connector	6.50 COM-6509 8.00
Use with	
Front connector	Cable
S7-300S-DA40P	DHH40-10K25L

