




LT508-RJ45485-44PR (right connection)

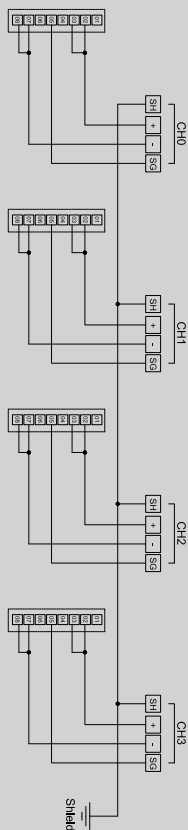

Technical data

Connection data	
Connection on control side	4 x RJ45 plug-in connectors
Connection size (field)	Push in spring x 4

Rated data	
Operating voltage	50V
Operating current per connection	1A
Number of signals	12

General data	
Ambient temperature	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Rated voltage	≤ 50V AC
Insulation test voltage	0.5KV DC
Weight	Approx. 70.9g

Dimensions	
Length x width x height (mm)	5.08 Pitch 97 x 45.5 x 45.3

Mounting rail	TS35 (Weidmuller)
---------------	-------------------

Ordering data	
Order No.	520620001 (5.08 Pitch)

Accessories / Spare part	
Terminal markers	5.08
Cross-connector	

Use with	
Front connector	Cable