

Digital output relay unit

For 16 isolated digital output signals

6ES7322-1BH01-0AA0 / 6ES7322-1BH10-0AA0

Relay - WAGO 6A 16 point (16a)

SR800 20P series





Bolt up




Bolt lock



Dark gray

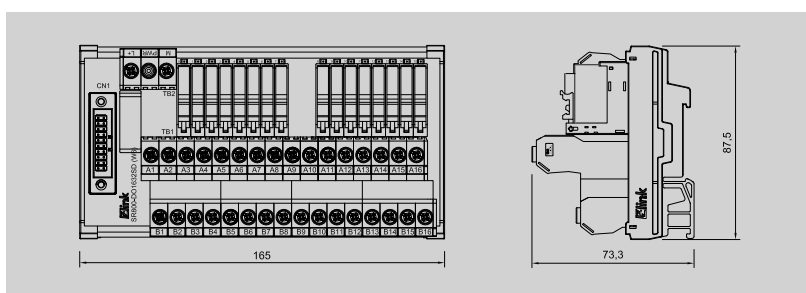

SR800-D01632SD (W6)

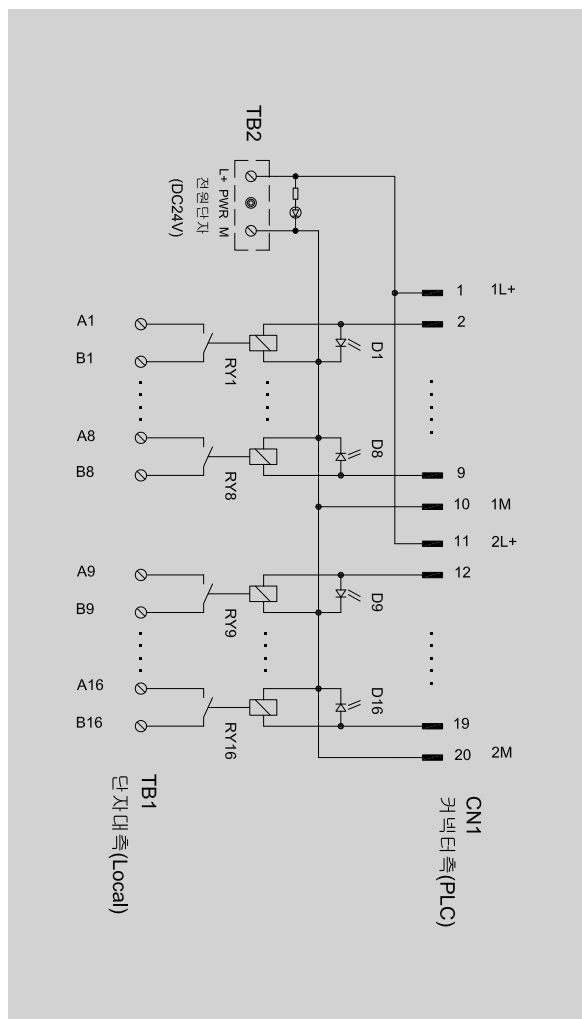

Technical data

Connection data	
Connection to PLC	HE 10 connectors 20-pin
Connection type (field)	Screw bolt up
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)
Nominal input data (coil)	
Rated voltage	24VDC ± 10%
Rated current DC	9.2mA
Pick-up / drop-out volt. DC-coil	>16.8V / <3.5V
Coil resistance (+ / - 10%)	2,600
Power rating	220mW
LED status indication per channel	Green(5mA)
Nominal output data	
Contact material	AgSnO ₂
Operating voltage	250VAC
Max. switching current	6A
Nominal switching capacity	6A 250VAC, 6A 30VDC
Minimum contact current	1mA
Minimum contact voltage	24V
General data	
Ambient temperature (operational)	-25°C ~ 50°C
Storage temperature	-40°C ~ 60°C
Weight 6.50 / 8.00	Approx. ---g / 444.2g
Dimensions	
Length x width x height (mm)	6.50 Pitch -
	8.00 Pitch 165 x 87.5 x 73.3
Mounting rail	
TS35 (Weidmuller)	
Ordering data	
Order No.	
--- (6.50 Pitch)	832220013 (8.00 Pitch)
Accessories / Spare part	
Terminal markers	6.50 8.00 DEK 5/8
Cross-connector	6.50 8.00 COM-8009
Use with	
Front connector	Cable
S7-300S-DA20P	DAHHC20-10K24B