



Digital output relay unit

For 32 isolated digital output signals (fuses) input selection ON / OFF / AUTO


6ES7322-1BL00-0AA0

Relay - Tyco 8A 32 point (32a, 32b)

SR650 40P series

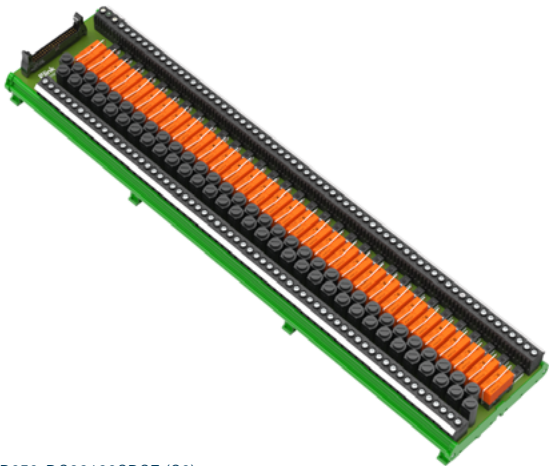

SR650-D032128SDSF (S8)

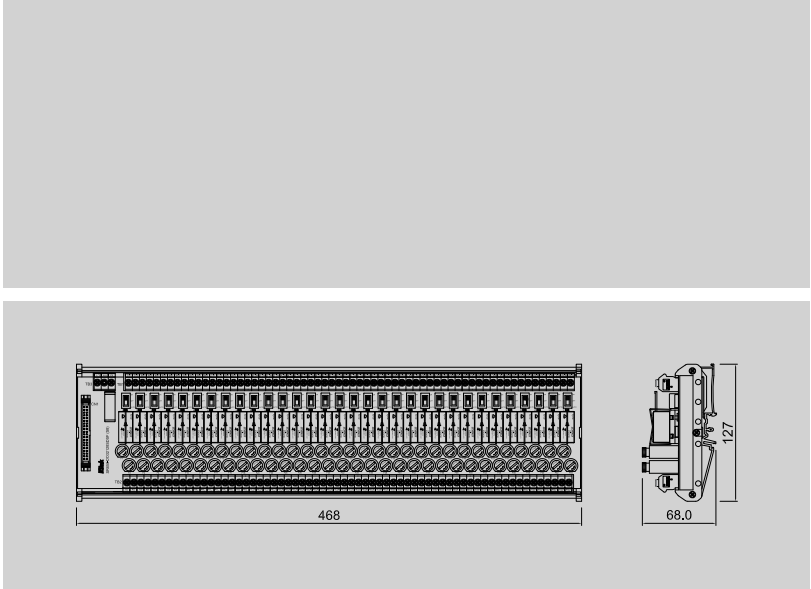

Technical data

Connection data		
Connection to PLC	HE 10 connectors 40-pin	
Connection type (field)	Screw bolt up	
Connection size (field)	0.34 ~ 2.5mm ² (AWG22 ~ 14)	
Nominal input data (coil)		
Rated voltage	24VDC ± 10%	
Rated current DC	16.7mA	
Pick-up / drop-out volt. DC-coil	>16.8V / <2.4V	
Coil resistance (+ / - 10%)	1,440	
Power rating	400mW	
LED status indication per channel	Red(5mA)	
Nominal output data		
Contact material	AgNi 90/10	
Operating voltage	250VAC	
Max.switching current	8A	
Nominal switching capacity	8A 250VAC, 8A 30VDC	
Minimum contact current	10mA	
Minimum contact voltage	10V	
Fuse per relay	5 / 8A	
General data		
Ambient temperature (operational)	-25°C ~ 50°C	
Storage temperature	-40°C ~ 60°C	
Weight 6.50 / 8.00	Approx. 1,466.7g / ---g	
Dimensions		
Length x width x height (mm)	6.50 Pitch	468 x 127 x 68
Mounting rail	TS35 (Weidmuller)	
Ordering data		
Order No.		
634219010 (6.50 Pitch)	--- (8.00 Pitch)	
Accessories / Spare part		
Terminal markers	6.50	8.00
Cross-connector	6.50 COM-6509	8.00
Use with		
Front connector	Cable	
S7-300S-DA40P	Page : 99	DHH40-10K25L Page : 107